## Lezzon

## Modern LED luminaire for schools and offices





Lezzon is a modern, energy efficient LED luminaire developed specifically for schools and office environments. It is an attractive solution for a wide range of areas and offers the ideal combination of energy efficiency and low maintenance. Lezzon gives both 65% direct and 35% indirect light, with a micro prism diffuser for the direct light and a line prismatic diffuser for the indirect light. It is available in a wide range of wattages, depending on lighting need and installation height. The housing is made of extruded aluminium to ensure good heat dissipation and a long lifetime.

Lezzon is now also available in tunable white, which makes it possible to change the colour temperature of the light from warm white to cool white. Tunable white lets you personalize the lighting to your mood or time of day, resulting in better focus and increased wellness.

- Energy efficient up to 126 lm/W
- Easy installation
- DALI versions
- · Based on Z-core technology
- 5 year guarantee
- Available in tunable white



The Z-core light engine is the platform for a family of luminaires. The core is made of extruded aluminium, which results in excellent cooling.

Patent Pending

IP20



















	ТҮРЕ	SYSTEM POWER (W)	LUMINOUS FLUX (lm)	LUMINAIRE EFFICACY (lm/W)	WEIGHT (kg)	ARTICLE NO.
	Lezzon 34W, 3000K	34	4027	118	6,4	206334800
	Lezzon 34W, 3000K, Dim dig/DALI	34	4027	118	6,4	206334820
	Lezzon 34W, 4000K	34	4148	122	6,4	206344900
	Lezzon 34W, 4000K, Dim dig/DALI	34	4148	122	6,4	206344920
	Lezzon 37W, 3000K	37	4526	122	6,4	206335500
S	Lezzon 37W, 3000K, Dim dig/DALI	37	4526	122	6,4	206335520
EL	Lezzon 37W, 4000K	37	4662	126	6,4	206345700
0 D	Lezzon 37W, 4000K, Dim dig/DALI	37	4662	126	6,4	206345720
٤	Lezzon 49W, 3000K	49	5637	115	6,4	206336800
	Lezzon 49W, 3000K, Dim dig/DALI	49	5637	115	6,4	206336820
	Lezzon 49W, 4000K	49	5806	118	6,4	206347000
	Lezzon 49W, 4000K, Dim dig/DALI	49	5806	118	6,4	206347020
	Lezzon 56W, 3000K	56	6591	118	6,4	206337900
	Lezzon 56W, 3000K, Dim dig/DALI	56	6591	118	6,4	206337920
	Lezzon 56W, 4000K	56	6789	121	6,4	206348200
	Lezzon 56W, 4000K, Dim dig/DALI	56	6789	121	6,4	206348220
	Lezzon TW, 41W, Dali	41	4510	110	6,4	206395020


**APPLICATIONS:** Offices, public areas and schools.


MATERIAL: Housing made of extruded aluminium for excellent heat dissipation. Micro prismatic diffuser for the direct light and a line-prismatic diffuser for the indirect light. White RAL 9016.

## INSTALLATION AND

CONNECTION: Pendant installation. Delivered with 1 m suspension wires that can be moved along the luminaire for easier installation. Delivered with 2 m white main cable with earthed plug. DALI version is supplied with 2 m 5 lead cable. The DALI version can also be dimmed by phase pulse control. Tunable White can be controlled via standard DALI DT8 control systems.

TECHNICAL DATA: 220-240V 50-60 Hz, IP20. SDCM 3. LED 3000K, 4000K or tunable white from 2 700K-6 500K. LED driver. Lifetime 50 000 hours (L70B10), CRI>80. Ambi-ent temperature: -25°C - +35°C. CE.



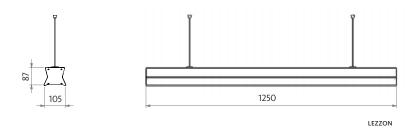

All specifications are subject to change. For the latest version of this product leaflet, please visit www.auralight.com/products.

2016-12-14

