


Aura Lunaria Pro Pendulum

A LED pendulum with uniform light and a slim design



Aura Lunaria Pro Pendulum is a high quality LED panel with 40% direct light and 60% indirect light. It prevents eye exhaustion and provides a uniform luminance all over the light panel. The Aura Lunaria Pro Pendulum fulfils the glare requirements for office work (UGR<19) and is especially suitable for computer work in accordance with EN-12464. The luminaire is very easy to install and is delivered complete with a one meter transparent cable. There is a friction lock in the ceiling cup which makes it possible to easily adjust the length of the cables without having to use any tools.

- **Energy efficient**
- **Light weight**
- **50,000 hours lifetime**
- **DALI dimmable**
- **Fulfils glare requirements for office**
- **5 year guarantee**


IP20



LED



CLASS I

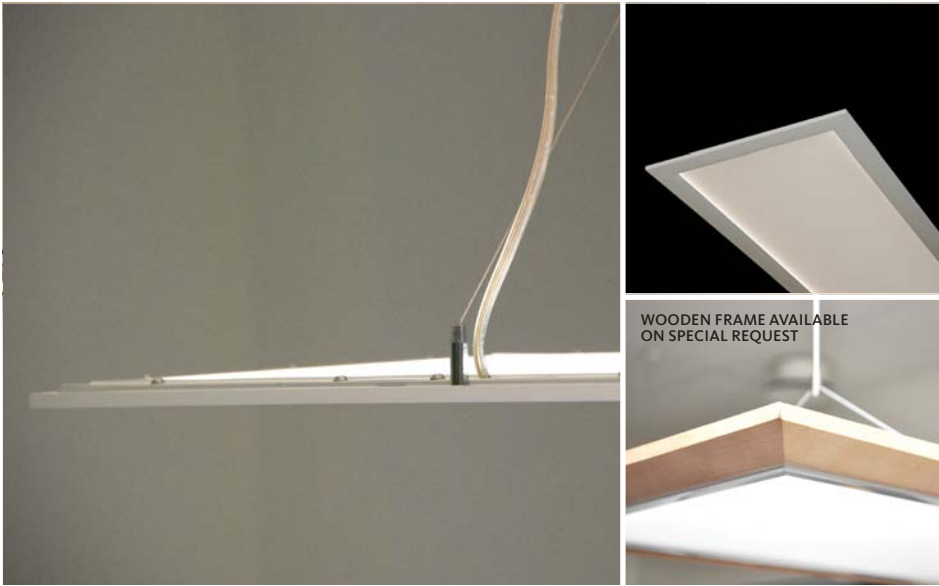

APPLICATIONS: office, hotels, retail, lobbies and public buildings.

MATERIAL: Body is made of steel and aluminum. RAL9010 White. Transparent cable. It is also possible to add a wooden frame on special request. Weight without frame is 3,9 kg, weight with frame is 4,9 kg.

INSTALLATION AND CONNECTION: Pendulum. Ceiling cup with four mounting holes. Possible to adjust the height by friction lock. The terminal block (5x1 mm²) is placed in the ceiling cup.

COMPONENTS: LED is available in 3000K and 4000K. Possibility of surface mounted cable, cc wires 60 cm. Dimmable via DALI.

TECHNICAL DATA: IP40. 120-277 V AC, 50-60 Hz, SDCM < Ambient temperature: 0°- +35°. Power factor Over 0.9. CRI > 80. Lifetime 50,000 hours (L70B10 at 25°C Ta). CE.



TYPE	SYSTEM POWER (W)	LUMINAIRE LUMINOUS FLUX (lm)	LUMINAIRE EFFICACY (lm/W)	WEIGHT (kg)	ARTICLE NO
DALI dim, white frame, 4000K	35	3550	101	3,9	81416100
DALI dim, white frame, 3000K	35	3350	96	3,9	81416101



KNOCK-OUT IN THE CEILING CUP



CEILING CUP CC 60 CM BETWEEN THE WIRES

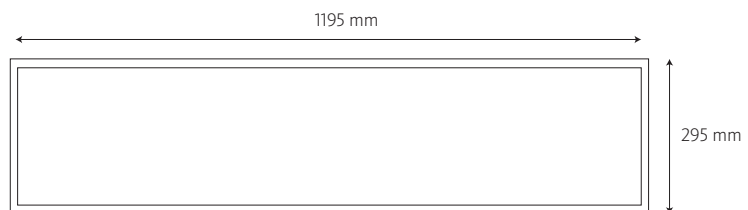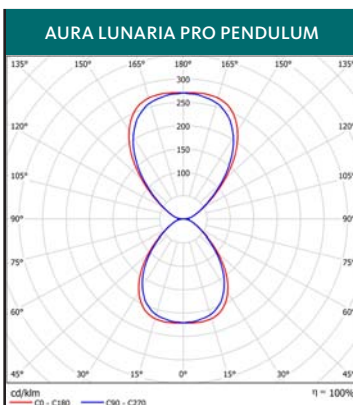

AURA LUNARIA PRO PENDULUM WITH WHITE FRAME 1195 X 295 mm